



# LOWE

## Equipment Sales Catalog



770 461 9001



Search: Lowe Refrigeration USA



[sales@loweusa.com](mailto:sales@loweusa.com)



We Are Lowe.

Lowe is a global, innovative, ambitious and award winning refrigeration and catering equipment company. Established in 1977, Lowe has grown to be the largest globally recognized equipment company for the retail, exhibitions and events markets.

Lowe innovates in every aspect of its business. Developing first to market solutions for refrigeration, such as customizable long-term rental, in a cost conscious and environmentally sensitive retail environment ensures Lowe remains a global pioneer.

# Contents

01	<b>Refrigerated</b>	
	B Series . . . . .	4
	B-LG . . . . .	5
	P360 . . . . .	6
	C Series . . . . .	7
	Euro Madeira . . . . .	8
	Mandy . . . . .	9
	Isola . . . . .	10
	G Series Refrigerator . . . . .	11
	G7 and G8 Refrigerator . . . . .	12
	K2T . . . . .	13
	K2TF . . . . .	14
	K3T . . . . .	15
	G223 . . . . .	16
	Multi-Fruit Citrus Juicer . . . . .	17
	Prep . . . . .	18
02	<b>Bakery</b>	
	Victoria . . . . .	19
03	<b>Wine Display</b>	
	Bodega . . . . .	20
04	<b>Frozen</b>	
	G7 and G8 Freezer . . . . .	21
	G Series . . . . .	22
	E2 . . . . .	23
	E3 . . . . .	24
	D1C . . . . .	25
	SS2P . . . . .	26
05	<b>Hot</b>	
	Isola 4HS/S . . . . .	27
06	<b>Cold Rooms</b>	
	Ready built cold rooms . . . . .	28
	Modular walk-in cold and freezer rooms . . . . .	29
	Where you need it. When you need it. . . . .	31

# B Series

## Euro Deli Curved Glass Display



### At a Glance

Model	B1	B2	B3
Dimensions WxDxH (inches):	52 3/8 x 43 x 52 1/2	77 x 43 x 52 1/2	101 5/8 x 43 x 52 1/2
Width without end walls (inches)	47	70 1/4	94
Display area (square feet)	11	16 1/2	22
Storage capacity (cubic feet)	5 1/2	8 1/4	10 3/4
Storage area width (inches)	47	70 1/4	94
Storage area depth (inches)	20	20	20
Storage area height (inches)	10	10	10
Condensing unit size (HP)	1/8	1/8	1/2
Refrigerant	R404A	R404A	R404A
Voltage	110V	110V	110V
Amps	7	9.9	12
Watts	2000	2000	2000
Deck fans	1	2	3
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C	34/42°F or 1/6°C

### Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Illuminated stainless steel display deck

- Rear access to display deck for server
- Refrigerated under-storage (accessed through rear doors with magnetic gaskets)
- Simple plug in operation
- Top hinged glass with hydraulic arm support for curved glass unit
- ABS foamed end walls
- Ice insert for fish display available upon request

\* Display shelf available upon request (NOT refrigerated)

# B - LG

## Deli Self-Service Display



### At a Glance

Model	B1 LG	B2 LG	B3 LG
Dimensions WxDxH (inches):	52 7/8 x 43 x 38 1/4	77 x 43 x 38 1/4	101 5/8 x 43 x 38 1/4
Width without end walls (inches)	47	70 1/4	94
Display area (square feet)	11	16 1/2	22
Storage capacity (cubic feet)	5 1/2	8 1/4	10 3/4
Storage area width (inches)	47	70 1/4	94
Storage area depth (inches)	20	20	20
Storage area height (inches)	10	10	10
Condensing unit size (HP)	1/3	1/3	1/2
Refrigerant	R404	R404	R404
Power supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Deck fans	1	2	3
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C	34/42°F or 1/6°C

### Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Refrigerated under-storage (accessed through rear doors with magnetic gaskets)
- Simple plug in operation
- Ice insert for fish display available upon request
- ABS foamed end walls

# P360°

## Grab & Go Island Display Refrigerator



### At a Glance

Model	P360°
Dimensions WxDxH (inches):	55 ½ x 47 x 35
Display area (square feet)	12 ¼
Condensing unit size (HP)	⅓
Refrigerant	R290
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	2
Temp Range	36/50°F or 2/6°C

### Features

- 360° product visibility
- Forced air system
- Castors supplied with case
- Stainless steel deck
- Protective bumpers
- European appearance
- Digital thermostat
- Suitable for all refrigerated products
- Gray bottom panels
- Simple plug in operation
- Ice insert for fish display available upon request



# C Series

Euro Dairy/  
Deli Merchandiser



## At a Glance

Model	C1	C2	C3
Dimensions WxDxH (inches):	39 ¾ x 34 x 84	52 ¼ x 34 x 84	77 x 34 x 84
Width without end walls (inches)	36 ¾	49 ½	73 ½
Number of shelves	4	4	4
Shelf width x depth (inches)	36 ¾ w x 17 ½ d	49 ½ w x 17 ½ d	73 ½ w x 17 ½ d
Display area (inches)	36 ¾ w x 24 d	49 ½ w x 24 d	73 ½ w x 24 d
Display area (sq.ft.)	18 ¾	24	36 ¾
Condensing unit size (HP)	¾	¾	1½
Refrigerant	R404A	R404A	R404A
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1	120/60/1
Amps (unit)	20	20	20
Watts (unit)	2000	2000	2000
Deck fans	1	2	3
Temp Range	35/42°F or 2/6°C	35/42°F or 2/6°C	35/42°F or 2/6°C

## Features

- Open front-self service grab and go
- Easy access for loading and cleaning
- Excellent vision through attractively styled side glass
- Color options available
- Four fully adjustable shelves
- Shelves can be angled
- Extra shelves available upon request
- Peg bars and pegs available upon request
- Energy saving self contained night blind
- Efficient, quiet system
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- No drain required (hot gas evaporation of defrost water)
- Impact resistant finish
- Pricing rails on each shelf
- Shelf product stoppers available upon request
- Vertical LED lighting

# Euro Madeira

## Multideck Display Case



### At a Glance

Model	Euro Madeira 1
Dimensions WxDxH (inches):	40 x 33 1/8 x 65 1/2
Display area (cu.ft)	46.5 cu ft
Weight (lbs)	353

### Features

- Integral unit
- Panoramic end walls
- Fan assisted cooling
- Automatic defrost
- Fully automatic operation
- Electronically controlled
- Digital temperature display
- Switchable internal horizontal illumination

- Manual night blind
- Multiplexable
- 3 fully adjustable (height and angle) shelves and base
- Ticket strips on shelves
- Color options available
- Refrigerant: R404A

#### Optional Extras

- Castors
- Under shelf lighting
- Black protective bumper
- LED lights
- Glass doors



# Mandy

## Open Front Merchandiser



## At a Glance

Model	Mandy 100
Dimensions WxDxH (inches):	39 ½ x 29 ¾ x 52
Width without end walls (inches)	36 ½
Top shelf	34 ¾ w x 8 ¾ d
Middle shelf (inches)	34 ¾ w x 10 d
Bottom shelf (inches)	34 ¾ w x 12 d
Bottom Deck (inches)	35 ¼ w x 22 d
Display area (square feet)	13
Condensing unit size (HP)	¾
Refrigerant	R404A or R290 versions
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	1
Temp Range	35/42°F or 2/6°C

## Features

- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Fits through single door
- Forced air cooling
- Fully self contained unit
- Heater pan evaporation (no plumbing required)
- Illuminated top shelf
- Simple plug in operation
- Stainless steel shelves and display deck
- 3 shelves as standard
- Energy saving self contained night blind

# Isola

## Cold Buffet Style Display



### At a Glance

Model	Isola 4S/S	Isola 6S/S
Dimensions WxDxH (inches):	59 ¼ x 29 ½ x 45	86 x 29 ½ x 45
Height (inches) top up	59	59
Condensing unit size (HP)	½	½
Refrigerant	R134	R134
Powers supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Temp range	38 /50°F or 3 /10°C	38 /50°F or 3 /10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight

### Features

- Internal basin in AISI stainless steel
- External in stainless steel
- Gastronorm pans available upon request
- Different configurations available
- Pans available upon request
- Accepts deep or shallow pans
- Static refrigeration system
- Digital control panel
- Electronic lid for ease of loading/serving
- Castors supplied with case
- Serving trays optional
- LED lighting optional

# G-Series

## Glass Door Refrigerator



### At a Glance

Model	G4C	G6C
Dimensions WxDxH (inches):	30 ½ x 32 x 80	54 x 32 x 80
Volume Cubic Feet	23.67 Cu. Ft.	48 Cu. Ft.
Refrigerant	R290	R290
Voltage	115V / 6-AMPS	115V / 7-AMPS
Door	1	2

### Features

Glass door reach in Refrigerator. Enhanced LED lighting designed to put your products in the spot light. Simple plug in operation with easy to use digital controls. Impact resistant finish for high traffic areas. Fully adjustable shelves for versatile product display.

- High vis glass doors
- Temperature range (33°F to 41°F)
- Adjustable shelves
- Ventilated cooling system
- High efficiency fans
- Automatic defrost system

- Digital electronic controller
- Castors for mobility
- Bright LED lighting
- Illuminated logo banner if desired

# G7 and G8

Double and Triple Glass Door Chiller  
(Dual Temperature Display)



## At a Glance

Model	G7	G8
Dimensions WxDxH (inches):	53 x 32 ½ x 80 ½	79 ½ x 32 ½ x 80 ½
Volume Cubic Feet	43 Cu. Ft.	62 Cu. Ft.
Refrigerant	R290	R290
Voltage	120V	120V
Door	2	3

## Features

Newly engineered, dual temperature, double and triple glass door merchandiser. Enhanced LED lighting designed to put your products in the spot light. Simple plug in operation with easy to use digital controls. Impact resistant finish for high traffic areas. Fully adjustable shelves for versatile product display

- Ventilated cooling system
- Dual temperature unit (-13°F to 50°F)
- High vis glass doors
- Maintenance free condenser
- High efficiency fans
- Automatic defrost system

- Adjustable shelves
- Digital electronic controller
- Castors for mobility
- Bright LED lighting
- Color options available

# K2T

## 4 Sided Glass Display Chiller



### At a Glance

Model	K2T
Dimensions WxDxH (inches):	23 ½ x 24 x 71
Shelf dimensions (inches)	16 ½ diameter
Number of shelves	6
Condensing unit size (HP)	⅓
Refrigerant	R134
Power supply v/Hz/Ph (unit)	120/60/1
Amps	20
Watts	2000
Evaporator fans	1
Temp range	35/50°F or 4/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight

### Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on four sides
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Rotating glass shelves (K2T) (mirrored bottom shelf)
- Rotation stops when door is opened
- Simple plug in operation

# K2TF

## 4 Sided Glass Display Chiller



### At a Glance

Model	K2TF
Dimensions WxDxH (inches):	23 ½ x 24 x 71
Shelf dimensions (inches)	17 ½ x 17 ½
Number of shelves	5
Condensing unit size (HP)	⅓
Refrigerant	R134
Power supply v/Hz/Ph (unit)	120/60/1
Amps	20
Watts	2000
Evaporator fans	1
Temp range	35/50°F or 4/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight

### Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on four sides
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Simple plug in operation



# K3T

## 6 Sided Glass Display



### At a Glance

Model	K3T
Dimensions WxDxH (inches):	31 ¾ x 36 x 69
Shelf diameter (inches)	22
Number of shelves	5
Condensing unit size (HP)	7/8
Refrigerant	R134
Power supply v/Hz/Ph (unit)	120/60/1
Amps	20
Watts	2000
Evaporator fans	1
Temp range	35/50°F or 4/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight

### Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on six sides
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Rotating glass shelves (mirrored bottom shelf)
- Rotation stops when door is opened
- Simple plug in operation

# G223

## Two Bowl Drink Dispenser



### At a Glance

Model	G223
Dimensions WxDxH (inches):	12 <sup>5</sup> / <sub>8</sub> x 18 <sup>1</sup> / <sub>8</sub> x 26 <sup>3</sup> / <sub>8</sub>
Bowls	2
Capacity Ltr.	23
Capacity Gallon	6.08
Net Weight	28
Supporting Base	29x24
Temp Range	39/61°F or 4/16°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Motorized paddle maintain mixing of product
- Adjustable thermostatic system
- Easily removable for cleaning
- Refrigeration System 220 Volt 50Hz

# Multi-Fruit Citrus Juicer

## Fruit Extraction Unit



## At a Glance

Model	MF Citrus Juicer
Dimensions WxDxH (inches):	23.4 x 34.8 x 65.4
Voltage	115
Amps	20 AMP Circuit

## Features

Newly engineered Multi-Fruit Juicer with the latest technology in total juice extraction. This juicer can juice faster than any other juicer on the market, and offer you the highest return on your investment. New touch screen offer many options, including WIFI capabilities to track your production and run times. Your customers will enjoy the theatrical presentation of watching their juice bottles filled with the fresh juice only found in your store.

- Juices: Oranges, Limes, Lemons, and Grapefruit
- Highest juice yields (2.5 gallons of juice per case)
- Lowest fruit cost per serving
- Reduced waste
- Total juice extraction
- Touch screen technology
- Industrial grade juicer
- Large hopper to hold fruit (two cases)
- Juices 25 fruit per minute
- Ice Beverage Cart – Display Fresh Juice (Accessories)
- Orange Caddy – Holds 7 cases of washed oranges (Accessories)

# Prep

## Refrigerated Prep Counter



### At a Glance

Model	Prep 1	Prep 2
Dimensions WxDxH (inches):	41 ½ x 32 ½ x 44 ½	67 ½ x 35 ½ x 41 ½
Storage area (inches)	25 ¼ w x 27 d x 24h	48 w x 27 d x 24 h
Shelf (inches)	24 w x 26 d	23 w x 26 d (x2)
Cutting board dimensions (inches)	44 w x 16 ½ d	67 ½ w x 19 ½ d
Condensing unit size (HP)	⅓	½
Refrigerant	R134	R134
Power supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fan assisted	yes	yes
Temperature Range	33.8°/41°F	33.8°/41°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Stainless steel finish
- Low energy consumption
- Two storage levels
- Adjustable shelves
- Six poly-carbonate inserts included
- Corrosion resistant white interior finish
- Automatic defrost cycle
- Extra deep removable cutting board
- Lockable castors
- Fully mobile

# Victoria

## Curved Glass Bakery Display



### At a Glance

Model	V150	V200
Dimensions WxDxH (inches):	56 $\frac{1}{2}$ x 36 x 50	74 x 36 x 50
Number of shelves	4	4
Top shelf dimensions (inches)	24 $\frac{1}{4}$ w x 15 d	32 $\frac{7}{8}$ w x 15 d
Other shelf dimensions (inches)	24 $\frac{1}{4}$ w x 17 d	32 $\frac{7}{8}$ w x 17 d
Condensing unit size (HP)	$\frac{1}{4}$	$\frac{1}{3}$
Refrigerant	R134A	R134A
Power Supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Temp Range	33/50°F or 2/10°C	33/50°F or 2/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Three exhibition levels
- Rear sliding glass doors
- Available in black or stainless finish
- Front access to condensing unit
- Double tempered curved glass
- Castors supplied with case
- Low energy consumption
- Easy to clean
- Automatic defrost cycle
- No drain required
- Stainless steel deck
- Stainless steel front
- Stainless steel shelves
- Static air system
- Wide stainless steel top

# Bodega

## Wine Display Chiller



### At a Glance

Model	Bodega
Dimensions WxDxH (inches):	23 ½ x 28 x 67 ¾
Condensing unit size (HP)	¾
Refrigerant	R134
Power Supply v/Hz/Ph (unit)	120/60/1
Amps	20
Watts	2000
Deck Fans	yes
Temp Range	41/60°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Dual zone built
- Seamless stainless steel door frame with 3 layer glass door
- Electronic thermostat for accurate temperature control
- Temperature setting memory in case of power off
- Fan circulated cool air for even temperature distribution
- LED lighting
- Easy to clean interior
- Efficient, quiet system
- Fully self contained
- Castors supplied with case



# G7 and G8

Double and Triple Glass Door Freezer  
(Dual Temperature Display)



## At a Glance

Model	G7	G8
Dimensions WxDxH (inches):	53 x 32 ½ x 80 ½	79 ½ x 32 ½ x 80 ½
Volume Cubic Feet	43 Cu. Ft.	62 Cu. Ft.
Refrigerant	R290	R290
Voltage	120V	120V
Door	2	3

## Features

Newly engineered, dual temperature, double and triple glass door merchandiser. Enhanced LED lighting designed to put your products in the spot light. Simple plug in operation with easy to use digital controls. Impact resistant finish for high traffic areas. Fully adjustable shelves for versatile product display

- Ventilated cooling system
- Dual temperature unit (-13°F to 50°F)
- High vis glass doors
- Maintenance free condenser
- High efficiency fans
- Automatic defrost system
- Adjustable shelves

- Digital electronic controller
- Castors for mobility
- Bright LED Lighting
- Color options available

# G-Series

## Freezer



### At a Glance

Model	G1C	G6FC
Dimensions WxDxH (inches):	30 ½ x 32 x 80	54 x 32 x 80
Volume Cubic Feet	23.67 Cu. Ft.	48 Cu. Ft.
Refrigerant	R290	R290
Voltage	115V / 10-AMPS	115V / 12-AMPS
Door	1	2

### Features

Glass door reach in Freezer. Enhanced LED lighting designed to put your products in the spot light. Simple plug in operation with easy to use digital controls. Impact resistant finish for high traffic areas. Fully adjustable shelves for versatile product display.

- High vis glass doors
- Temperature range (-10°F to 10°F)
- Adjustable shelves
- Ventilated cooling system
- High efficiency fans
- Automatic defrost system

- Digital electronic controller
- Castors for mobility
- Bright LED Lighting
- Illuminated logo banner if desired

# E2

## Wall Site Display Freezer



### At a Glance

Model	E2
Dimensions WxDxH (inches):	88 x 35½ x 40
Condensing unit size (HP)	½
Refrigerant	R404
Power Supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Static Refrigeration	yes
Temp Range	0/-22°C or 32/-8°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Curved glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case

# E3

## Wall Site Display Freezer with Side Visibility



### At a Glance

Model	E3
Dimensions WxDxH (inches):	77 x 34 x 37
Condensing unit size (HP)	½
Refrigerant	R404
Power Supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Static Refrigeration	yes
Temp Range	0/-22°C or 32/-8°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Curved glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case

# D1C

## Sliding Glass Display Freezer



### At a Glance

Model	D1C
Dimensions WxDxH (inches):	58 x 30 x 34
Condensing unit size (HP)	½
Refrigerant	R-290
Power Supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Static Refrigeration	yes
Temp Range	50/-4°F

### Features

- 5 baskets standard
- 2 sliding glass lids
- LED lighting
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Simple plug in operation with simple controls
- Castors supplied with case

# SS2P

## Two Flavor Soft Serve Ice Cream Machine



### At a Glance

Model	SS2P
Dimensions WxDxH (inches):	21 x 27½ x 52
Condensing unit size (HP)	1½, ⅛
Refrigerant	R404
Power supply v/Hz/Ph	220V single phase
Amps	30
Watts	3000

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

### Features

- Small foot print, saves valuable floor space
- Easy cleaning and operation
- No installation required, plug it in and it is ready to go
- Castors supplied with case
- Soft serve mix not included
- Sanitized prior to each rental
- Serves two flavors plus a swirl option
- Overnight switch to keep product refrigerated when not in use
- Automatic shut off when product is low



# Isola 4HS/S

## Bain Marie Buffet Style Display



### At a Glance

Model	Isola 4HS/S
Dimensions WxDxH (inches):	59 ¼ x 29 ½ x 45
Height (inches) top up	59
Power supply v/Hz/Ph	120/60/1
Amps	30
Watts	3000
Temp range	100/194°F or 38/90°C

Plug - each unit requires a single dedicated power supply.

### Features

- Electrically raised canopy
- Castors supplied with case
- Divider bars included
- Stainless steel option available
- Adjustable water temperature control
- Fitted drain
- Heat lamps for additional heating
- 'Low water level' alarm
- Serving trays optional
- Digital control panel
- Pans available upon request
- Internal basin in AISI stainless steel
- Accepts deep or shallow pans
- Different configurations available
- Gastronorm pans available upon request

# Ready Built Cold Rooms



## At a Glance

Model	Cold Room
External Width (inches)	94 ¼
External Length (inches)	117 3/8
External Height (inches)	93
Power Supply v/Hz/Ph	220/60/1
Amps	30

## Features

- "All-Weather" exterior
- Internal light
- Internal "glow in the dark" safety handle
- Easily made mobile
- Refrigerator & freezer temps available
- NSF approved "3-tier" racking included
- Secure, simple temperature control
- Non-slip floor
- Ramp included
- Fork lift friendly
- Lockable door - self closing
- Strong hinge system
- External gauge displaying box temperature
- Quiet operation of ETL approved condensing unit
- Health and safety code compliant
- Simply hardwire to your generator or existing power




# Modular walk-in cold and freezer rooms



8ft by 8ft Modular  
Walk-in Cold Room.  
(smallest size available)  
Length can be increased  
in 2ft increments.  
Width can be increased  
in 8ft increments with  
interior walls.

- Quickly built on-site
- Dual temperature
- Indoor and outdoor use
- Pallet size doors available.

From the world's largest sporting events to state fairs, festivals, care centers, emergency relief, construction renovation, and so much more, LOWE Cold Rooms provide the perfect refrigerated storage solution. Mobile & remote, climate controlled modular refrigeration / freezer cold rooms engineered for quiet efficiency even in the most challenging environments.

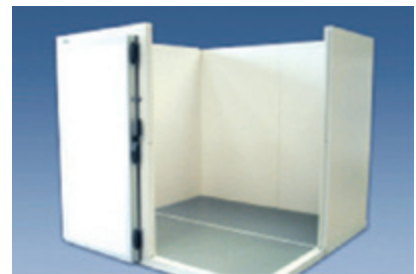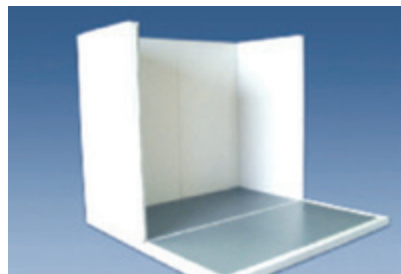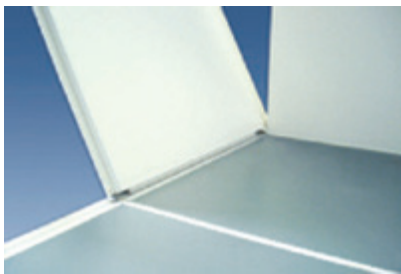

With the largest modular cold room rental fleet in the world, LOWE Refrigeration's extensive logistical program enables us to meet your unique event requirements and ensure successful on time delivery and installation to your event.

## Take advantage of our freight savings.

A large number of modular cold rooms can be loaded onto a single trailer. This creates an efficiency and economy that ready built rooms can't duplicate.



Our quick & efficient on-site build process saves you time and money



Our steel frame leveling system allows us to place cold rooms almost anywhere, and create efficiency by placing refrigerated storage in convenient locations.

**Tie Down Straps** can be placed over modular cold rooms to provide extra security in high wind environments. Strapping uses a ratchet and stake system that allows each unit to be pinned in place. This system includes ratchets, pin stakes, stake puller, mid and end straps.





# Where you need it. When you need it.

Build on pristine grass in front of clubhouse. No forklift needed.



Inside or outside of any structure. No fumes. Almost silent.



Build on a cart path or remote site with ease.



No vehicular access - no problem. Modular cold rooms can be taken through 3ft door to build inside.

## Specifications

Power Requirements	220v / 60Hz / Single Phase / 30 Amp Breaker
(Note: LOWE can supply a splitter box allowing 2 motors to run off a single power supply )	
Drain	Not Required
Inside Door Handle	Glow in the dark
Strip Curtain	Fitted at door entry
Color	White
Dimensions WHL (inches)	Internal 88 x 80 x 88/ External 95 x 87 x 95

8ft x 8ft is the smallest size available. Length increases by increments of 2ft.  
Width increases by increments of 8ft with interior walls. **Call to reserve your customized cold room.**

# Notes

Handwriting practice area with 20 sets of dotted lines for tracing and writing.



# Notes

Notes section with horizontal dotted lines for writing.









We Are Lowe.