



LOWE

Refrigeration Range 2022

+44 (0) 1283 820717
Lowe Equipment Sales
sales@lowerental.com



We Are Lowe.

Lowe is a global, innovative, ambitious and award-winning refrigeration equipment company.

Established in 1977, Lowe has grown to be the largest globally recognised refrigeration equipment company for the retail, exhibitions and events markets.



Continually innovating within its product lines, Lowe sources from the world's leading refrigeration manufacturers to bring a range and quality of equipment that is unrivalled.

Contents

Milan - Refrigerated Display Counter	4
Hyder - Refrigerated Butchers Counter	5
Reno - Refrigerated Display Counter	6
Opal - Open Front, Patisserie Case & Hot Display Cabinets	7
Cedar SS- Stainless Steel Integral Multideck Chiller On R290	8
Roma - Low Front Refrigerated Multideck Display Case	9
Atlas - Multideck Chillers & Freezers	10
CT Series (LG Twist) - Refrigerated Multideck Display Case.	12
G4-SIM, G6-SIM, H3DD - Drinks chillers.	13
Monaco - Sliding Glass Display Freezer	14
E1 SIM - Chest freezers	15
Global - Glass Door Chiller/Freezer	16
Verona G7D Range- Double Door Display Chillers & Freezers	17
Siena - Dual Temp Display Chiller / Freezer	18
Casey Black - Chillers And Freezers.	19
Mawson Island Chiller - Panoramic Island Display Chiller	20
Cold Rooms - Modular	22
Storage chillers & freezers	23

Milan

Refrigerated Display Counter

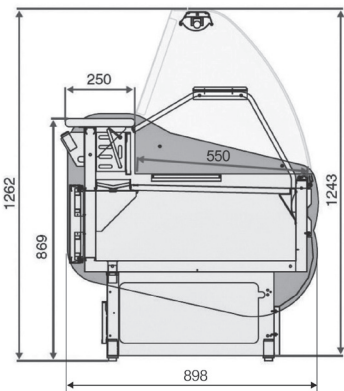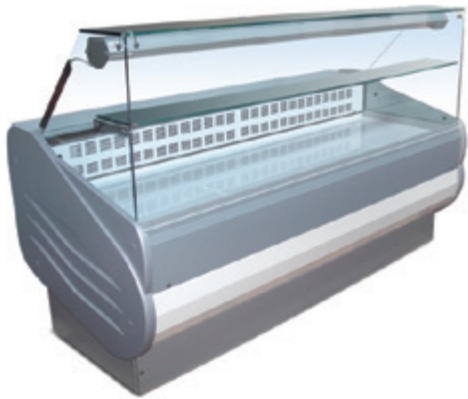

At a Glance

Model	Milan 100	Milan 150	Milan 200	Milan 250	Milan 300
External Dimensions (WxDxH) mm	1040x898x1262	1520x898x1262	2000x898x1262	2480x898x1262	2960x898x1262
Weight (kg)	125	150	180	220	260
Display Area (m²)	0.6	0.83	1.1	1.38	1.66
Storage volume (L)	120	249	332	415	498




Features

Italian budget semi-ventilated serve over counter with refrigerated under storage

- Integral unit
- Semi-ventilated counter
- Automatic defrost
- Electronically controlled
- Temperature display
- Curved front glass
- Intermediate ambient glass shelf
- Internal illumination
- Large white display deck (55cm)
- Refrigerated under storage
- Colour: grey I white
- Temperature Range: -1...+7°C
- Suitable for 25°C ambient and 60% RH
- Refrigerant: R452a
- Options: remote units, different colours for front panels, rear sliding doors

Hyder

Refrigerated Display Counter

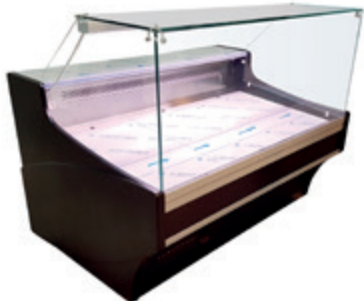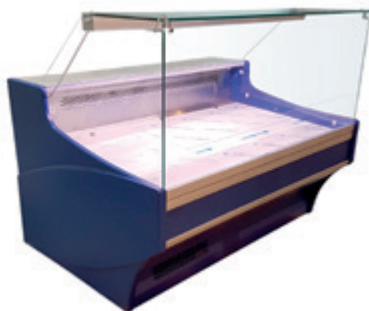

At a Glance

Model	Hyder10	Hyder13	Hyder15
External Dimensions (WxDxH) mm	1055x1100x1235	1305x1100x1235	1525x1100x1235
Display area (m²)	0.79	0.99	1.17
Storage capacity (m³)	0.38	0.5	0.58
Doors	1	2	2

Model	Hyder20	Hyder25	Hyder30
External Dimensions (WxDxH) mm	2025x1100x1235	2525x1100x1235	2995x1100x1235
Display area (m²)	1.58	1.99	2.37
Storage capacity (m³)	0.79	0.99	1.25
Doors	3	4	4


Features

Stylish straight or curved glass serve over display counter with refrigerated under storage and hinged front glass

- Integral unit
- Fan assisted cooling
- Automatic defrost
- Electronically controlled
- Temperature display
- Hinged straight or curved front glass
- Internal LED illumination
- Stainless steel back shelf
- Rear socket
- Large stainless steel display deck (80cm)
- Refrigerated under storage
- Colour: standard grey (optional choice of colours)
- Temperature: -1...+5°C (Class 3M1)
- Suitable for 25°C ambient and 60% RH
- Refrigerant: R290
- Options:
- Remote units
- Multiplexing
- Castors
- Corners (90° internal and external)
- Self-service version
- Cash counters
- Intermediate glass shelf, shelf with extra lighting
- Dividers, stepped decks
- Sliding back doors
- Different colours for front panels, full decoration

Reno

Refrigerated Display Counter

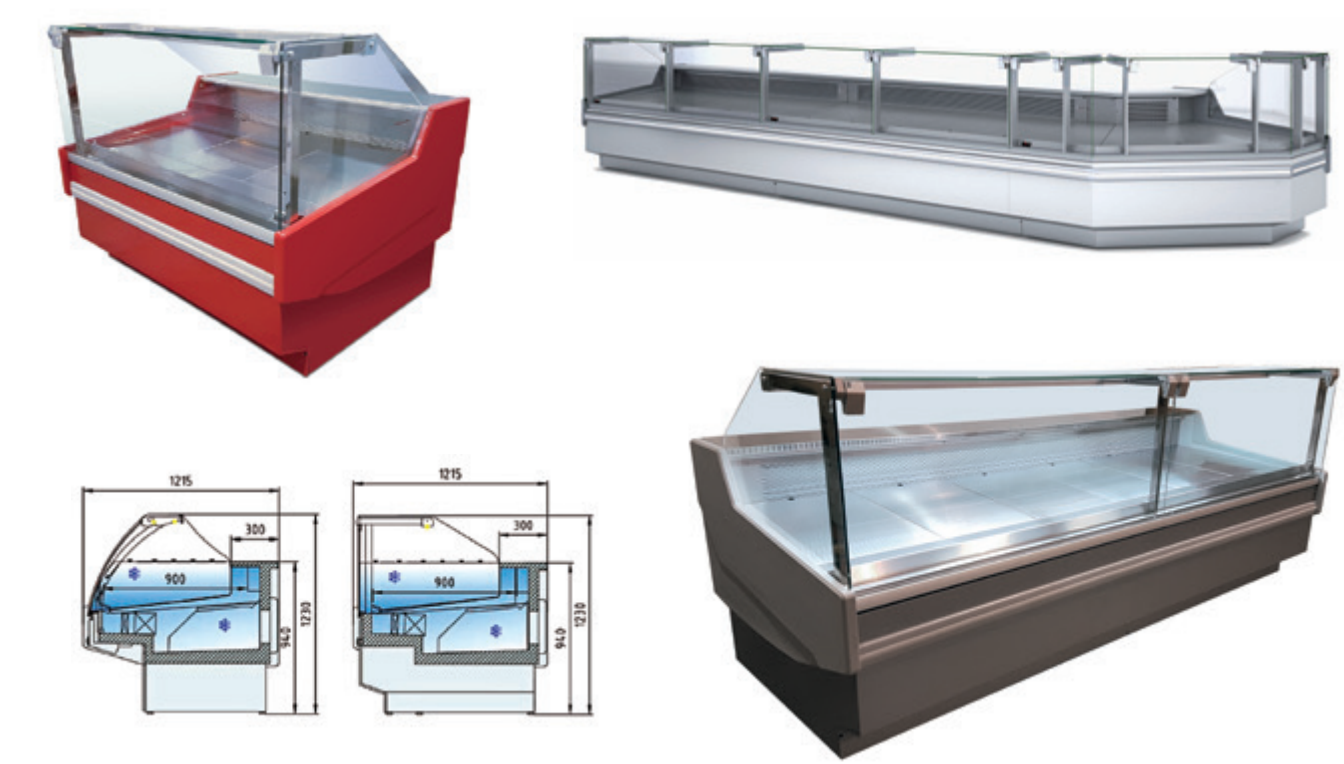

At a Glance

Model	Reno10	Reno13	Reno15
External Dimensions (WxDxH) mm	1055x1215x1230	1305x1215x1230	1525x1215x1230
Display area (m²)	0.98	1.21	1.41
Storage capacity (m³)	0.4	0.52	0.6
Doors	1	2	2

Model	Reno20	Reno25	Reno30
External Dimensions (WxDxH) mm	2025x1215x1230	2525x1215x1230	2995x1215x1230
Display area (m²)	1.88	2.34	2.78
Storage capacity (m³)	0.81	1.1	1.28
Doors	3	4	4

Features

Stylish straight or curved glass serve over display counter with refrigerated under storage and hydraulic lifted front glass

- Integral unit
- Fan assisted cooling
- Automatic defrost
- Electronically controlled
- Temperature display
- Internal LED illumination

- Straight or curved front glass lift up with hydraulic lifts
- Stainless steel back shelf
- Rear socket
- Large stainless steel display deck (86cm)
- Refrigerated under storage
- Colour: standard grey (optional choice of colours)
- Temperature: -1...+5°C (Class 3M1)
- Suitable for 25°C ambient and 60% RH
- Refrigerant: R290

- Options
- Remote units
 - Multiplexing
 - Castors
 - Corners (90° internal and external)
 - Self-service version
 - Cash counters
 - Intermediate glass shelf, shelf with extra lighting
 - Dividers, stepped decks
 - Sliding back doors
 - Different colours for front panels, full decoration

Opal

Open front, Patisserie case & Hot Display Cabinets



At a Glance

Model	Opal Hot 6	Opal Hot 9	Opal Hot 13	Opal Hot 16
External Dimensions (WxDxH) mm	600x730x1380	950x730x1380	1300x730x1380	1650x730x1380
Display area (m²)	0.54	0.9	1.26	1.62
Sliding doors	No	2	2	2
Nominal power (W)	1026	1657	2482	3308

Features

- External finish in plastic coated steel, lacquered or stainless steel
- Sides in ABS injected thickness 40mm
- Internal finish in AISI-304 18/10 stainless steel
- Double glazed
- Anodised aluminium profiles
- Adjustable steel rod shelves (height and tilt), with LED lighting
- 40 Kg/m³ density polyurethane insulation, low GWP and zero ODP effect
- Humidifier drawer
- Electronic temperature controller
- Temperature range: +60°C / +70°C (and 45% -50% HR)

At a Glance

Model	Opal 6-6	Opal 6-9	Opal 6-13	Opal 6-16
External Dimensions (WxDxH) mm	600x730x1380	950x730x1380	1300x730x1380	1650x730x1380
Display area (m²)	0.54	0.9	1.26	1.62
Sliding doors	NO	2	2	2
Nominal power (W)	1067	1376	1739	1963

Features

- External finish in plastic coated steel, lacquered or stainless steel
- Sides in ABS injected thickness 40mm
- Internal finish in AISI-304 18/10 stainless steel
- Double glazed
- Electronically controlled
- Anodised aluminium profiles
- Auto defrost and auto evaporation of condensate
- Adjustable (height) glass shelves with LED lighting
- Temperature range: +2°C / +8°C (at max. 25°C and 60% HR)
- Refrigerant: R290
- Options:
 - Stainless steel or coloured finish
 - Curved or straight glass
 - Castors
 - Open fronted / self-service version

Cedar SS

Stainless steel integral multideck chiller
on R290 refrigerant



At a Glance


Model	C0- CEDAR 06	C1- CEDAR 09	C2- CEDAR 12	C2- CEDAR 15	C3- CEDAR 1875	C4- CEDAR 2500
Width mm	625	937	1250	1563	1875	2500
End wall thickness mm	30	30	30	30	30	30
Width (incl. end walls) mm	685	997	1310	1623	1935	2560
Depth mm	632	632	632	632	632	632
Height (incl. castors) mm	2085	2085	2085	2085	2085	2085
Total display area (TDA) m²	0.8	1.2	1.6	2.0	2.4	3.2
Net Volume litres	218	326	434	543	652	869
Refrigerated shelf area m²	1.0	1.5	2.0	2.5	3.0	4.0

Features

- Integral unit
- Ventilated refrigeration system
- Electronic controller
- Automatic defrost
- Stainless steel or colour on request (inside & outside)
- Top LED light (optional undershelf lights)
- Glazed or solid / mirrored end walls
- Light switch
- On castors
- 4 x shelves with EPOS ticket strips (h.40mm)
- Manual night blind
- Climate Class: 3 (up to 25°C ambient & 60%RH)
- Temperature range: -1...5°C (3M1)
- Refrigerant: R290

Roma

Low Front Refrigerated Multideck Display Case

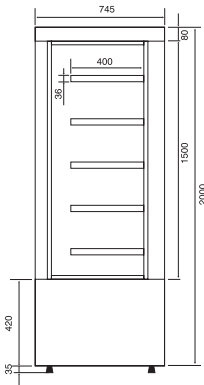

At a Glance

Model	C1-F Roma 10	C2-F Roma 12	C3-F Roma 20	C4-F Roma 24
Dimensions (WxDxH) mm	1000 x 745 x 2000	1200 x 745 x 2000	2000 x 745 x 2000	2400 x 745 x 2000
Display area m²	2.21	2.67	4.57	5.37
Refrigerant	R448a	R448a	R448a	R448a
Temperature Range	-1...+7°C	-1...+7°C	-1...+7°C	-1...+7°C
Weight kg	232	257	385	470

Features

- Slimline low front white multideck display cabinet with 5 fully adjustable shelves and glazed end panels
- Slimline design
- Integral unit
- Low front for maximum display
- Fan assisted cooling
- Automatic defrost
- Fully automatic operation
- Electronically controlled
- Temperature display
- Fully glazed end panels
- LED Top internal illumination
- LED Vertical illumination
- Slow return night blind
- 5 fully adjustable (height and angle) shelves and base
- Ticket strips on shelves
- Acrylic shelf risers
- Adjustable feet
- Colour: white
- Suitable for 25°C ambient and 60% RH

Atlas

Multideck Chillers & Freezers



3dr Chiller + 2dr Freezer

Features

High performance & energy efficient integral multideck chillers & freezers on R290 refrigerant



- Slimline design - 730mm deep
- Integral unit
- Variable speed compressor
- Ventilated refrigeration system
- Electronic controller
- Automatic defrost
- Standard colour – white
- Top LED lights
- Glazed or solid with mirror end walls
- 5 x shelves with EPOS ticket strips
- Lift up base shelves
- Climate Class: 3 (up to 25°C ambient & 60%RH)
- Temperature range: -1...5°C (3M1)
- Refrigerant: R290

Options

- Freezers: 2dr, 3dr and 4dr
- Open fronted chiller for fruit & veg
- Full depth design - 930mm deep
- Extra high version - 2226mm high
- Remote units
- Full vision glass doors
- Undershelf LED lighting
- Product dividers, shelf product stoppers
- CORK CORE® cork thermal insulation

Atlas

Multideck Chillers & Freezers

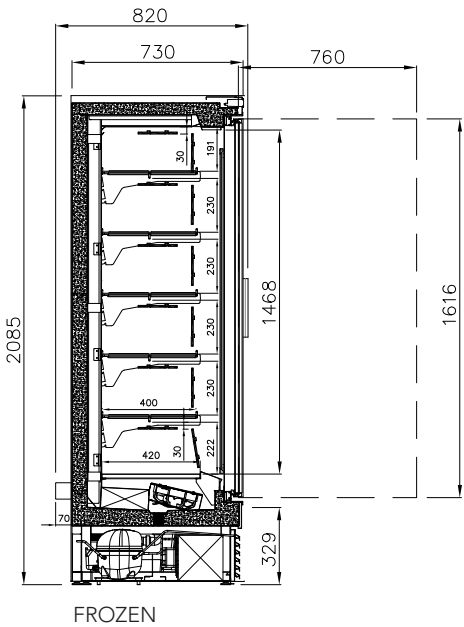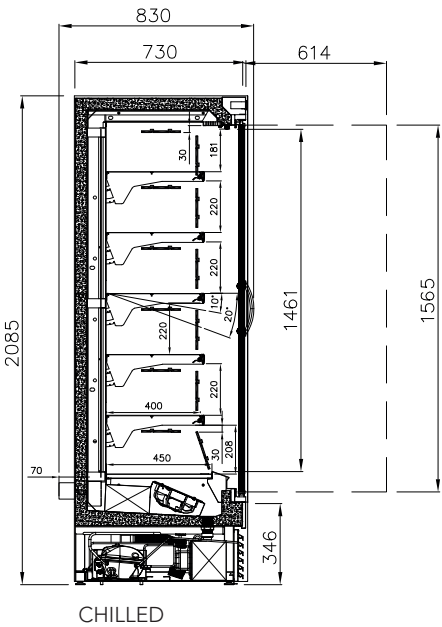

At a Glance


CHILLED	C2-Atlas 1250	C3-Atlas 1875	C4-Atlas 2500	C6-Atlas 3750
Width mm	1250	1875	2500	3750
Width (incl. end walls) mm	1330	1955	2580	3830
Depth mm	730	730	730	730
Height mm	2085	2085	2085	2085
Shelf & deck area sq.m	3.06	4.59	6.13	9.19
Net volume litres	770	1154	1539	2309
Net weight kg	338	449	519	779
No. of doors	2	3	4	6
Energy consumption (Solid Sides) kWh/24hrs	3.04	4.56	6.08	9.11
Energy consumption (Panoramic Sides) kWh/24hrs	4.05	6.08	8.10	12.15
Energy class	A	B	B	B

FROZEN:	G7-Atlas 1562	G7-Atlas 2343	G7-Atlas 3114*
Width mm	1562	2343	3114
Width (incl. end walls) mm	1662	2443	3214
Depth mm	730	730	730
Height mm	2085	2085	2085
Shelf & deck area sq.m	3.78	5.67	7.56
Net volume litres	917	1376	1834
No. of doors	2	3	4
Energy consumption kWh/24hrs	22.08	33.12	44.16
Energy class	D	D	D

*3ph power supply required

CT Series (LG Twist)

Refrigerated Multideck Display Case

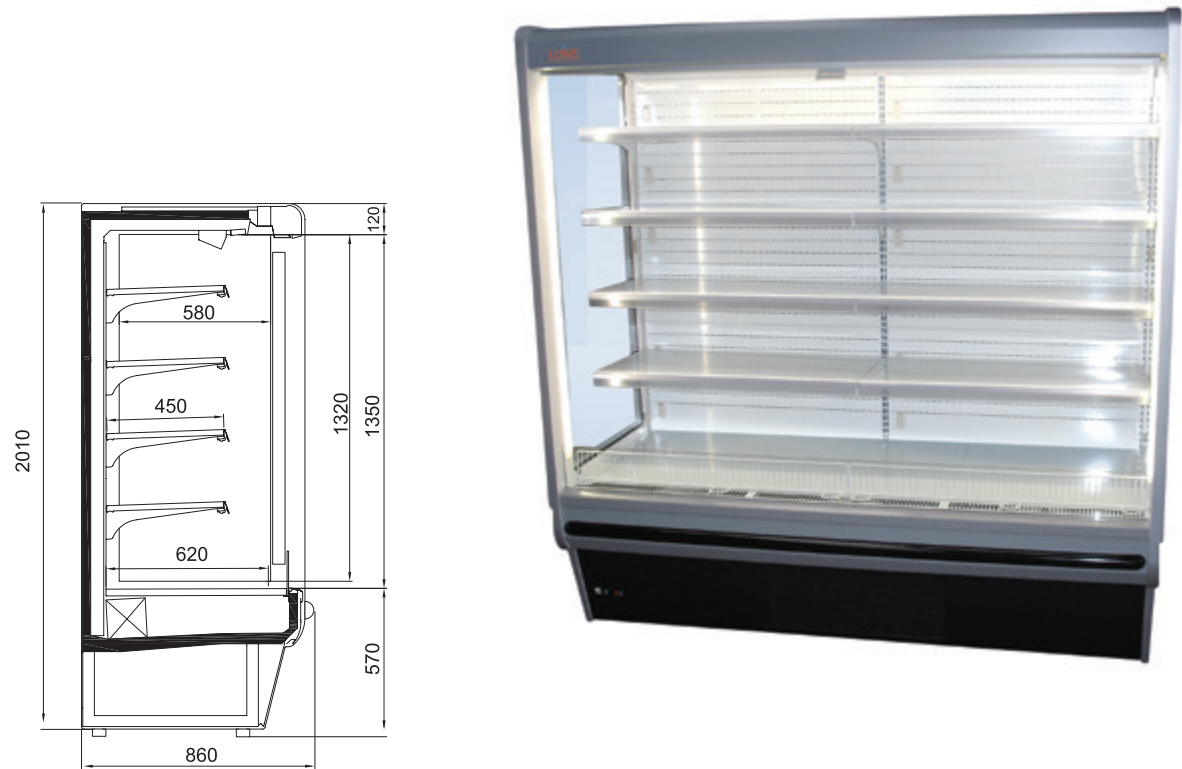

At a Glance

Model	C1T (LG Twist 937)	C2T (LG Twist 1250)	C3T (LG Twist 1875)	C4T (LG Twist 2500)
External dimensions (WxDxH)	1017x860x2010	1330x860x2010	1955x860x2010	2580x860x2010
Refrigerated shelf area (m2)	2.27	3.03	4.54	6.05
Gross volume (litres)	582	776	1164	1553
Weight (kg)	265	290	370	480
Energy consumption (kWh/24hrs)	22.11	25.64	31.91	48.41

Features

- Integral unit
 - Vertical and horizontal LED lights
 - Panoramic end walls
 - Fan assisted cooling
 - Automatic defrost
 - Fully automatic operation
 - Electronically controlled
 - Digital temperature display
 - Switchable internal illumination
- 4 fully adjustable (height and angle) shelves and base
 - Ticket strips on shelves
 - Manual night blind
 - Adjustable feet
 - Colour: grey
 - Temperature: -1...+5°C (Class 3M1)
 - Suitable for 25°C ambient and 60% RH
 - Refrigerant: R449a
- Options

 - Different colours
 - Version with doors (Eco Twist)
 - Solid, mirrored end walls
 - Protective bumpers
 - Intermediate divider with double mirrors
 - Intermediate perspex divider
 - Multiplexing
 - Castors

G4-SIM, G6-SIM, H3DD

Drinks chillers



Single and double glass door display chillers & double door back bar chillers

At a Glance

Model	G4-SIM	G6-SIM	H3DD
External dimensions (WxDxH)	595x605x1994	1200x718x2145	900x505x895
Capacity (gross/net) L	373 / 358	1118 / 1017	191 / 183
Shelves	5	4	2
Refrigerant	R600a	R290	R600a
Weight kg	80	195	69
Energy consumption kWh/24hrs	2.4	6.7	2.7

Features G4-SIM & G6-SIM

- White exterior with black door frames
 - White interior
 - Mechanical thermostat
 - Fan door switch
 - Lockable & self-closing doors
 - Integrated door handle
 - Internal Led light
- Led illuminated lightbox
 - Designed for drinks and packaged products
 - Automatic defrost
 - Automatic evaporation of defrost water
 - Fan assisted
 - Suitable for 32°C ambient & 65% RH (Climate class 4)
 - Temperature range +1°C to +10°C

Features H3DD

- Black exterior
 - White interior
 - Electronic controller
 - Lockable & self-closing doors
 - Internal Led light
 - Designed for drinks and packaged products
- Automatic defrost
 - Automatic evaporation of defrost water
 - Fan assisted
 - Suitable for 32°C ambient & 65% RH (Climate class 4)
 - Temperature range +1°C to +10°C

Monaco

Sliding Glass Display Freezer



At a Glance

Model	Monaco D1C	Monaco D2C
External Dimensions (WxDxH) mm	1475x757x837	2000x757x837
Weight (kg)	80	120
Energy consumption (kWh/24hrs)	5.5	6.5

Features

High vision display freezer with sliding glass lids with full set of baskets, and on castors

- Integral unit
- Manual defrost
- Temperature display
- Sliding glass lids with lock
- With full set of baskets / grids
- Front bumper bar
- On castors
- Colour: white
- Temperature: -18 ... -25°C

- Suitable for 25°C ambient and 60% RH
- Refrigerant: R290

- Options
- Units on feet
 - Different colours
 - Branding
 - Baskets

E1 SIM

Chest freezers



At a Glance

Model	E1-SIM 160	E1-SIM 210	E1-SIM 310	E1-SIM 410	E1-SIM 510	E1-SIM 610
External dimensions (WxDxH)	577x578x904	767x659x904	1043x659x904	1318x659x904	1494x659x904	1777x659x904
Volume (gross / net) litres	118/80	198/137	297/210	397/283	461/330	563/438
Weight kg	40	45	55	65	75	85
Energy rating	E	E	F	F	F	F
Energy consumption kWh/24hrs	1.81	2.18	3.11	3.49	4.21	5.06
Refrigerant	R600a	R600a	R290	R290	R290	R290

Features

Glass lid chest freezers / ice cream conservators

- Plug in unit
- Curved sliding glass lids with lock
- Manual thermostat
- Analogue thermometer
- Manual defrost

- Full set of baskets
- Castors
- Suitable for 35°C ambient & 75% RH (Class 7L1)
- Temperature range: -14°C to -24°C

Global

Glass Door Chiller/Freezer



At a Glance

Model	Global 4 (Single)	Global 6 (Double)	Global 8 (Triple)
External Dimensions (WxDxH) mm	680x700x2090 / 1990	1370x700x2090 / 1990	2057x700x2090 / 1990
Internal height (mm)	1331	1331	1331
Temperature Range	+2...+8°C	+2...+8°C	+2...+8°C
Volume (L)	578	1078	1426

Model	Global 1 (Single)	Global 7 (Double)	Global 9 (Triple)
External Dimensions (WxDxH) mm	680x700x2090 / 1990	1370x700x2090 / 1990	2057x700x2090 / 1990
Internal height (mm)	1331	1331	1331
Temperature Range	-24...-18°C	-24...-18°C	-24...-18°C
Volume (L)	578	1079	1547

Features

Chiller & freezers with hinged glass door featuring automatic defrost system and adjustable shelving, with LED lights and top illuminated canopy.

- Integral unit
- Electronically controlled
- Fan assisted cooling
- Automatic defrost
- Fully automatic operation
- Adjustable thermostat
- Temperature display
- Internal LED illumination
- LED lit top light box
- Self closing hinged doors
- 5 heavy duty shelves plus base
- Fully adjustable shelving
- On castors as standard (available on feet)
- Standard colour: white
- Refrigerant: R290

Verona G7D Range

Double Door Display Chillers & Freezers on Hydrocarbon R290 refrigerant



At a Glance

Model	Verona G7D CHILLER	Verona G7D FREEZER
Width mm	1250	1250
Depth mm	686	686
Height mm	2025	2025
Capacity (net)	1000	1000
Internal dimensions mm	1150x600x1465	1150x600x1465
Net weight kg	144	144
Energy consumption kWh/24hrs	10.98	12.95



Features

- Plug in unit
- Digital controller
- Self-closing doors
- Internal LED light
- 4 adjustable levels of shelves plus base
- Shelf dimensions: 565mm x 438mm
- Automatic defrost
- Automatic evaporation of defrost water
- Fan assisted
- Suitable for 25°C ambient & 60% RH
- Temperature range: +1°C ...+4°C / -15°C to -20°C
- Refrigerant: R290

- Options:**
- Castors
 - Other RAL colours finish

Siena

Dual temp display chiller / freezer



At a Glance

Model	Siena 1	Siena 2	Siena 3
Dimensions (WxDxH):	670x640x1950	1320x640x1950	1970x640x1950
Volume (L):	380	810	1310
Temperature Range:	+5 /-25°C	+5 /-25°C	+5 /-25°C

Features

Dual temp units can be used as a chiller or a freezer at the push of a button. Larger capacities or deeper cabinets also available.

Italian dual temperature cabinet (chiller / freezer) with hinged glass door and adjustable shelves

- Integral unit
- Electronically controlled
- Fan assisted cooling
- Automatic defrost
- Fully automatic operation
- Adjustable thermostat
- Temperature display
- Switchable internal illumination
- Glass display door
- Self closing heated door
- 5 shelves + base
- Fully adjustable shelving
- On castors
- Colour: grey
- Suitable for 25°C ambient and 60% RH
- Refrigerant: R452a

Casey Black

Chillers and freezers



At a Glance

Model	G1-Casey Black	G7-Casey Black	G9-Casey Black
External dimensions WxDxH (mm)	680 x 730 x 2040	1370 x 730 x 2040	2055 x 730 x 2040
Capacity (litres)	505	1201	1852
Nominal power (W)	560	902	1726
Shelves	4	8 + 4	12 + 8
Temperature range	-15...-20°C	-15...-20°C	-15...-20°C

Model	G4-Casey Black	G6-Casey Black	G8-Casey Black
External dimensions WxDxH (mm)	680 x 730 x 2040	1370 x 730 x 2040	2055 x 730 x 2040
Capacity (litres)	505	1201	1852
Nominal power (W)	260	396	943
Shelves	4	8 + 4	12 + 8
Temperature range	-2...+8°C	-2...+8°C	-2...+8°C


Features

Integral single, double and triple door display chillers & freezers on R290 refrigerant

- Integral unit
- Electronic controller
- Black plastic coated exterior (white colour - option)
- Rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self-closing system, blocked opening, magnetic gasket
- Freezers - triple glazed door, Chillers - double glazed door
- Internal LED illumination
- Reinforced shelves made of plasticized steel wire, adjustable in height
- Adjustable feet (castors or legs – option)
- Removable control panel and engine ventilation grill
- Fan assisted evaporator, with epoxy anticorrosion coating
- Evaporator fan stop
- Automatic evaporation of defrost water
- Digital temperature control, door open and high-temperature condensation alarms.
- Max. ambient temperature: 32°C
- Refrigerant: R290

Mawson Island Chillers Range

Panoramic Island Display Chiller

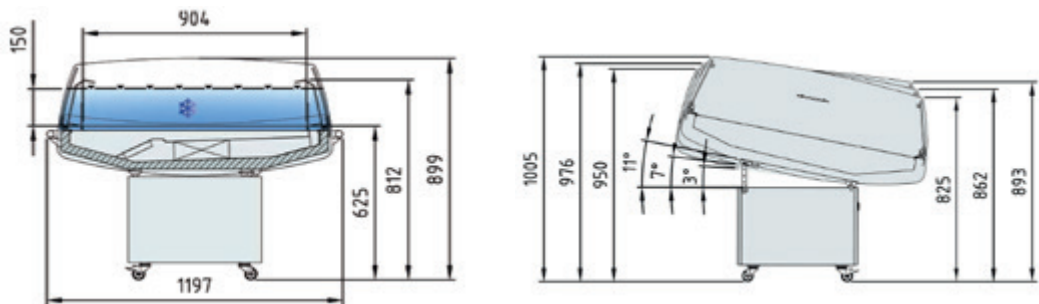

At a Glance

Model	Mawson
Dimensions WxDxH (mm)	1250x1197x900
Display (m²)	1.22
Nominal power (W)	750



Features

Fan assisted panoramic promotional display chiller unit on R290 Hydrocarbon

- Temp range: class 3M1 class - +1°C - +5°C
- Fan assisted
- Electronic controller
- Fully automatic operation
- Double glazed panels
- Adjustable tilting display
- Stainless steel bumper
- Castors
- Exterior in plasticized sheet steel
- Interior in epoxy or stainless steel
- Automatic defrost
- Front tempered safety glass

Mawson Island Chillers Range

Panoramic Island Display Chiller



Mawson 90



Mawson 190



Mawson 1250 Square




Mawson 1250
Wall Site Chiller




Cold Rooms

Modular

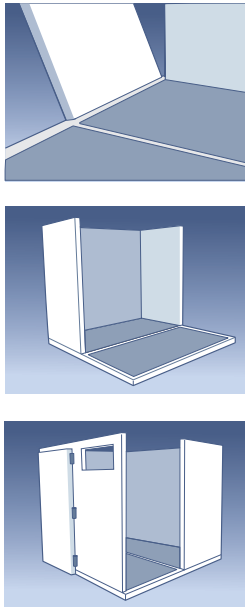

Modular walk-in cold rooms provide the perfect refrigerated storage solution even in the most challenging environments. Lowe's extensive logistical program ensures successful delivery and installation, each and every time.

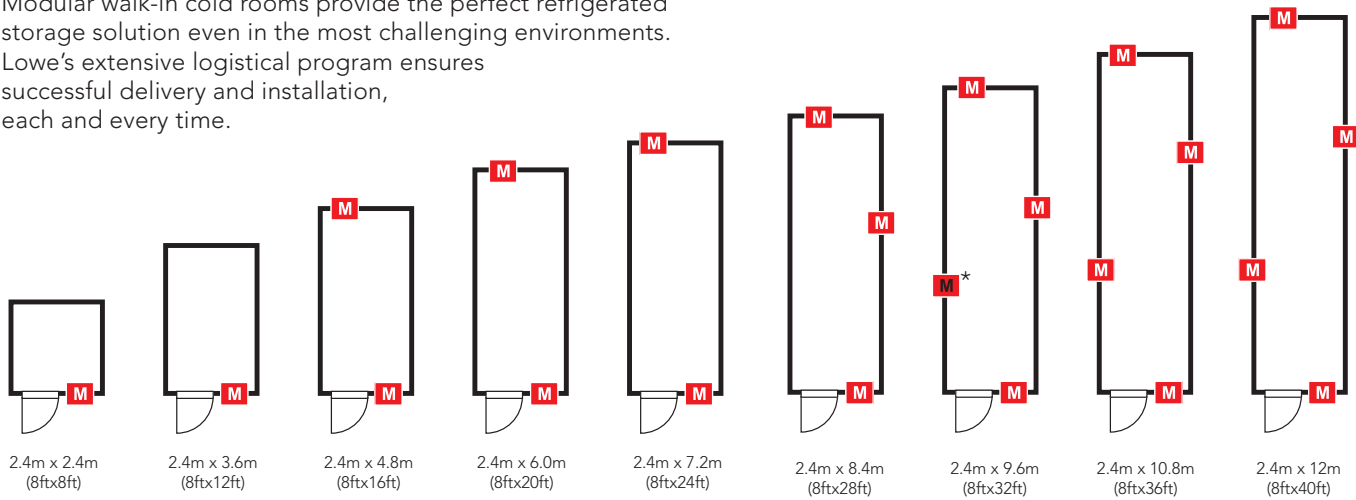

Doors can be added on the long side also. *additional monoblock units for the freezer

At a Glance

Dimensions (WxDxH)		
2.4 x 2.4 x 2.2 m	2.4 x 6.0 x 2.2 m	2.4 x 9.6 x 2.2 m
2.4 x 3.6 x 2.2 m	2.4 x 7.2 x 2.2 m	2.4 x 12 x 2.2 m
2.4 x 4.8 x 2.2 m	2.4 x 8.4 x 2.2 m	3.8 x 11 x 2.2 m

Other sizes and features available on request

Features & Services

- Suitable for indoor and outdoor use
- Internal racking
- Ramps suitable for roll cage and jackstack operation; available on request
- Python cut panels for beer keg piping; available on request
- Remote temperature monitoring; available on request
- Lockable door & internal emergency door release feature
- Full technical backup is provided with each rental
- Chill Strips; available on request

Technical Features

- 16 amp single phase power requirement
- Fan assisted cooling
- Automatic defrost
- Digital temperature display
- Dual temperature function between -25°C and +10°C
- 80mm thick polyurethane insulation
- Self-extinguishing panels in the event of fire
- Easy clean plastic with Food Safe interior

Storage Chillers & Freezers



- H1 - white under counter storage fridge
- H2 - white under counter storage freezer
- G5-400 - white 400 litres storage chiller
- G2-400 - white 400 litres storage freezer
- G5-600 - white 600 litres storage chiller
- G2-600 - white 600 litres storage freezer

C1 & C2 Promo Till Point Chillers

- C1 PROMO - 64cm wide promo till chiller
- C2 PROMO - 90cm wide promo till chiller



GN Gastronorm Chillers & Freezers

- GN700P – single door chiller
- GN700N – single door freezer
- GN1400P – double door chiller
- GN1400N – double door freezer

Storage Chest Freezers

- F1 - 1m white chest freezer
- F2 - 1.3m white chest freezer
- F3 - 1.5m white chest freezer
- F4 - 1.8m white chest freezer





We Are Lowe.

Would You Like to Talk
to Lowe ?

+44 (0) 1283 820717



sales@lowerental.com

Search
Lowe Equipment Sales